

## CPP1000 금전함 설정 업데이트 매뉴얼


업데이트 전 준비물

LAN 케이블 1EA , CPP1000 프린터 1EA , POS 1EA

1) 프린터에서 selftest 용지 출력 후 IP 주소를 확인하십시오




2) 우측하단 렌 설정 우 클릭 후 네트워크 및 공유센터 열기를 클릭하십시오.

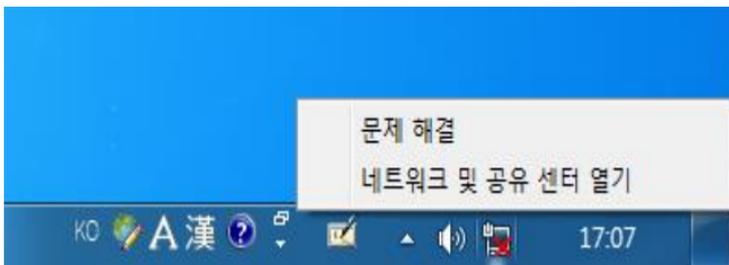


3) 로컬 영역 연결 4를 클릭하십시오





4) 로컬 영역 연결 4 에서 속성을 클릭하십시오.

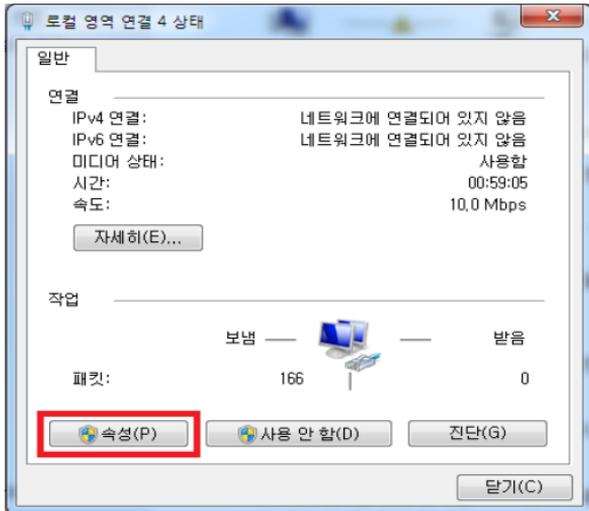

5) 속성에서 'Internet Protocol Version 4' 를 클릭하십시오

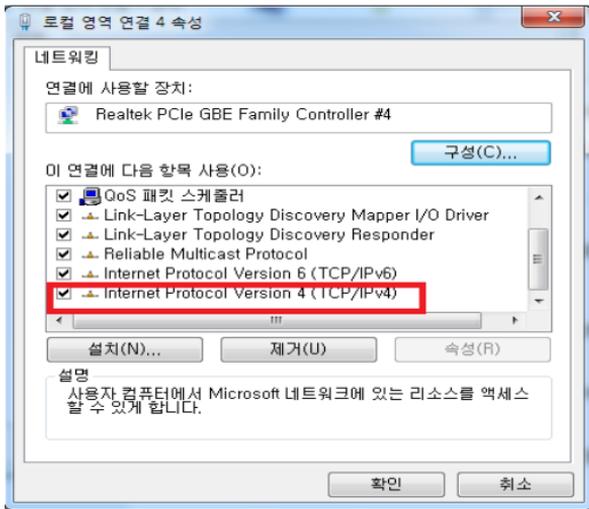


6) 'Internet Protocol Version 4' 에서 프린터와 동일한 IP 로 수정하십시오.

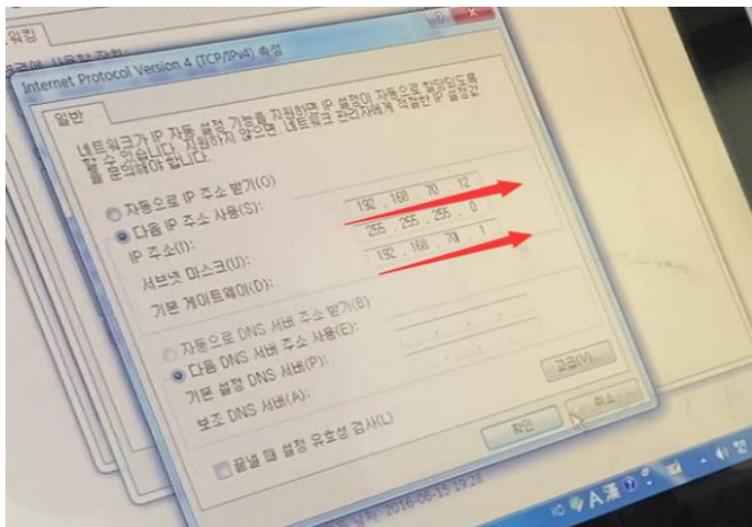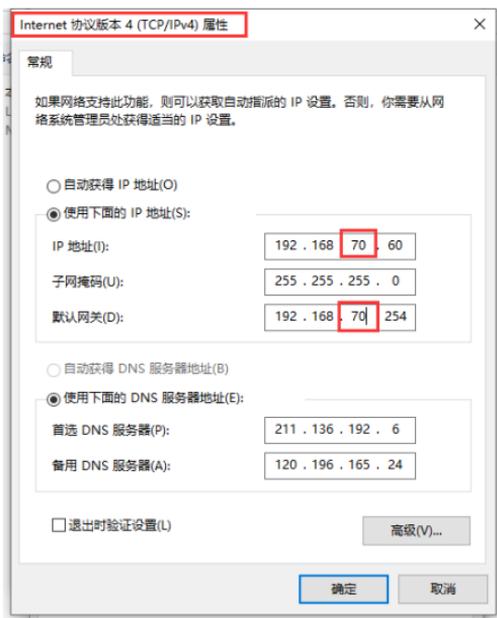


7) 'Firmware\_C1IT-2020-06-22' 파일을 실행하십시오

 Firmware\_C1IT-2020-06-22.exe


8) 파일에서 IP 주소를 입력 후 PORT TEST 를 진행하십시오

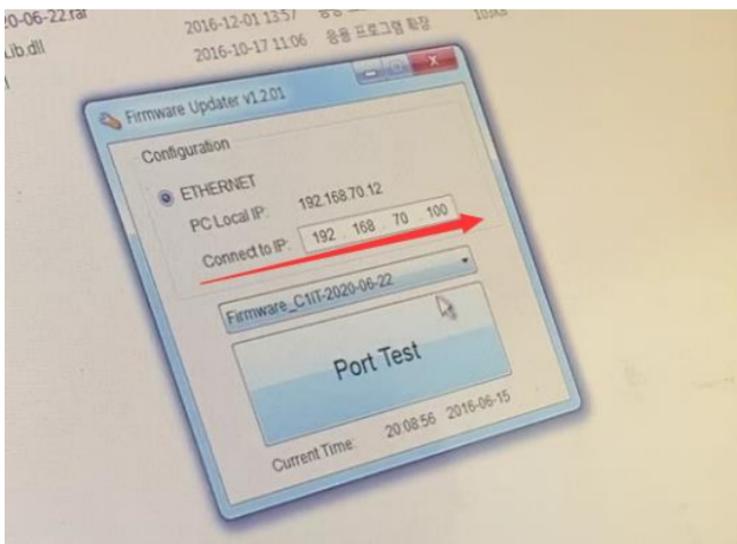



9) CPP1000 프린터에서 용지출력을 확인하십시오

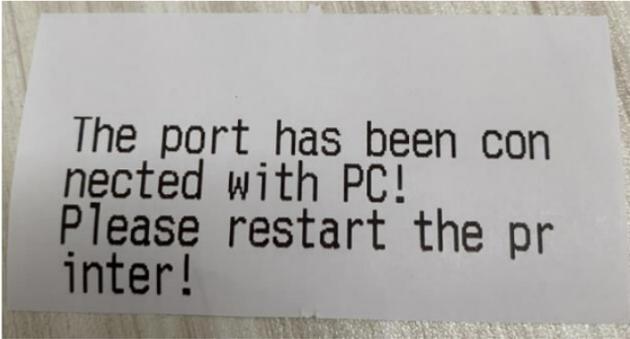

10) 프린터를 다시 시작 후 update firmware 를 진행하십시오.

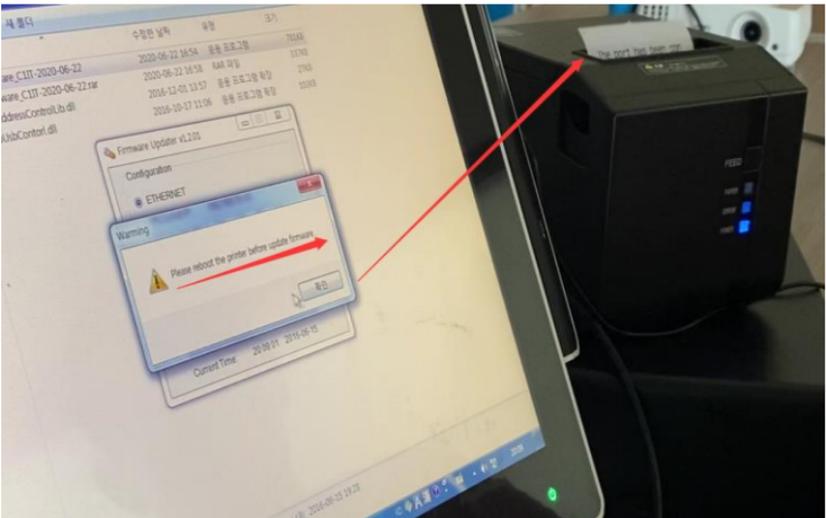

11) 프린터를 다시 시작 후 update firmware 를 진행하십시오.

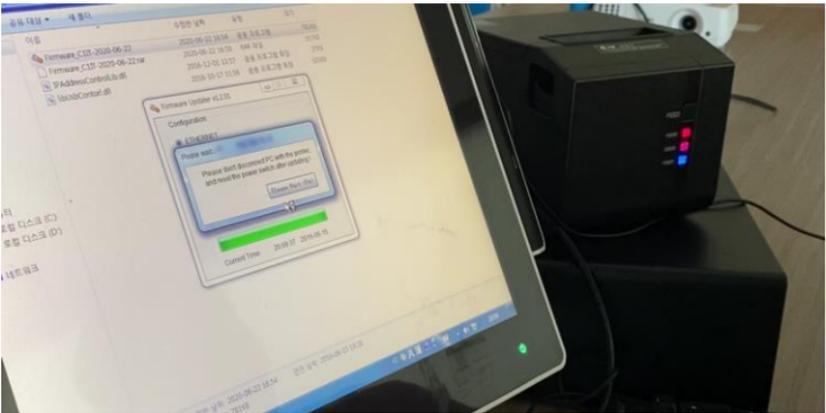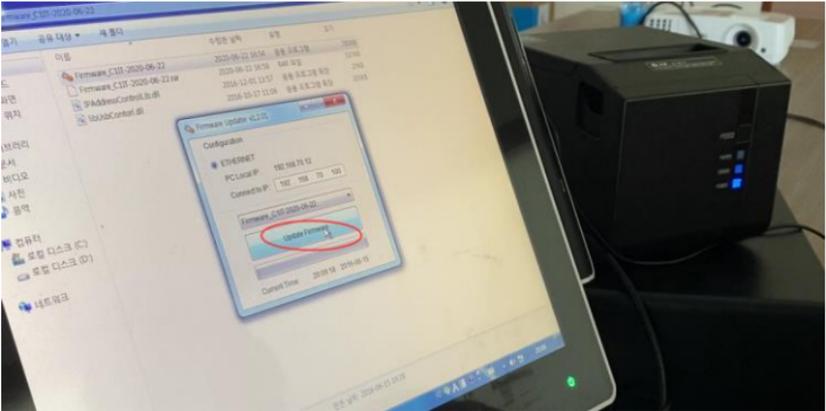

**※프린터 업데이트 시 종료하거나 조작하지 마십시오**

12) 프린터에서 selftest 용지 출력 후 버전을 확인하십시오.



13) 프린터에서 DIP 스위치 6 번으로 금전함, 외장벨 설정 하십시오

답스위치 6 번 OFF 설정시 Normal 금전함 수동

```
Version: 1.00QL
Command mode: EPSON(ESC/POS)-S
Interface: USB &
Serial 9600,None,8,1 &
Ethernet(10Base/100Base)
Protocols: TCP/IP (A1) (C1) (9100 4000)
Mac address: 00-47-50-46-2F-2C(Hex)
IP address: 192.168.0.105
Netmask: 255.255.255.0
Gate Way: 192.168.123.1
DHCP: Disabled
Cutter: Yes
Beeper: No
Chinese character mode: Yes
Cashdrawer Mode: Normal
Character per Line: 48-FontA/64-fontB
Print Density: Light
Default code page: page 0
Black mark mode: No
Paper end copy mode: Yes
Vertical motion units: 0.5
USB number is fixed: Yes
Quick response: Yes
USB device id: No
Paper save mode: No
Board ver: No
Print Speed: 250mm/s(Max)
Modify date: 2020/06/22
```

답스위치 6 번 ON 설정시 RING 금전함 자동 , 외장벨설정

```
Version: 1.00QL
Command mode: EPSON(ESC/POS)-S
Interface: USB &
Serial 9600,None,8,1 &
Ethernet(10Base/100Base)
Protocols: TCP/IP (A1) (C1) (9100 4000)
Mac address: 00-47-50-46-2F-2C(Hex)
IP address: 192.168.0.105
Netmask: 255.255.255.0
Gate Way: 192.168.123.1
DHCP: Disabled
Cutter: Yes
Beeper: No
Chinese character mode: Yes
Cashdrawer Mode: Ring
Character per Line: 48-FontA/64-fontB
Print Density: Light
Default code page: page 0
Black mark mode: No
Paper end copy mode: Yes
Vertical motion units: 0.5
USB number is fixed: Yes
Quick response: Yes
USB device id: No
Paper save mode: No
Board ver: No
Print Speed: 250mm/s(Max)
Modify date: 2020/06/22
Resident Character:
```